

Georgia Institute of Technology
School of Electrical and Computer Engineering

EE4321

Power System Engineering

Spring 2009

Homework Assignment #2
Due January 27, 2009

Problem P1: A three-phase transmission line connects two electrical power systems as in Figure P1a. The line configuration is shown in Figure P1b. Each phase conductor has the following parameters: $r = 0.12$ ohms/mile and $GMR = 0.035$ feet. The operating voltage of the line is 115kV line to line. The line length is 80 miles and the soil resistivity is 500 ohm-meters. Each of the power systems is represented as an equivalent source that is solidly grounded and with the following sequence impedances:

$$Z_1 = Z_2 = j0.1 pu, \quad Z_0 = j0.06 pu$$

The voltage sources behind the equivalent impedances are in phase.

- (a) Compute the fault currents for a single-phase to ground fault at the middle of the line using symmetrical components. Assume a 0.5 ohm fault impedance.
- (b) Compute the fault currents for a single-phase to ground fault at the middle of the line using direct phase analysis. Assume a 0.5 ohm fault impedance.
- (c) Compare the results from (a) and (b). State your own conclusions.

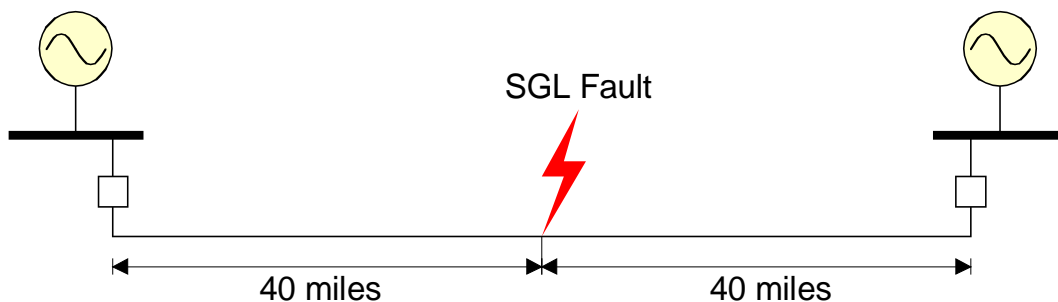


Figure P1a

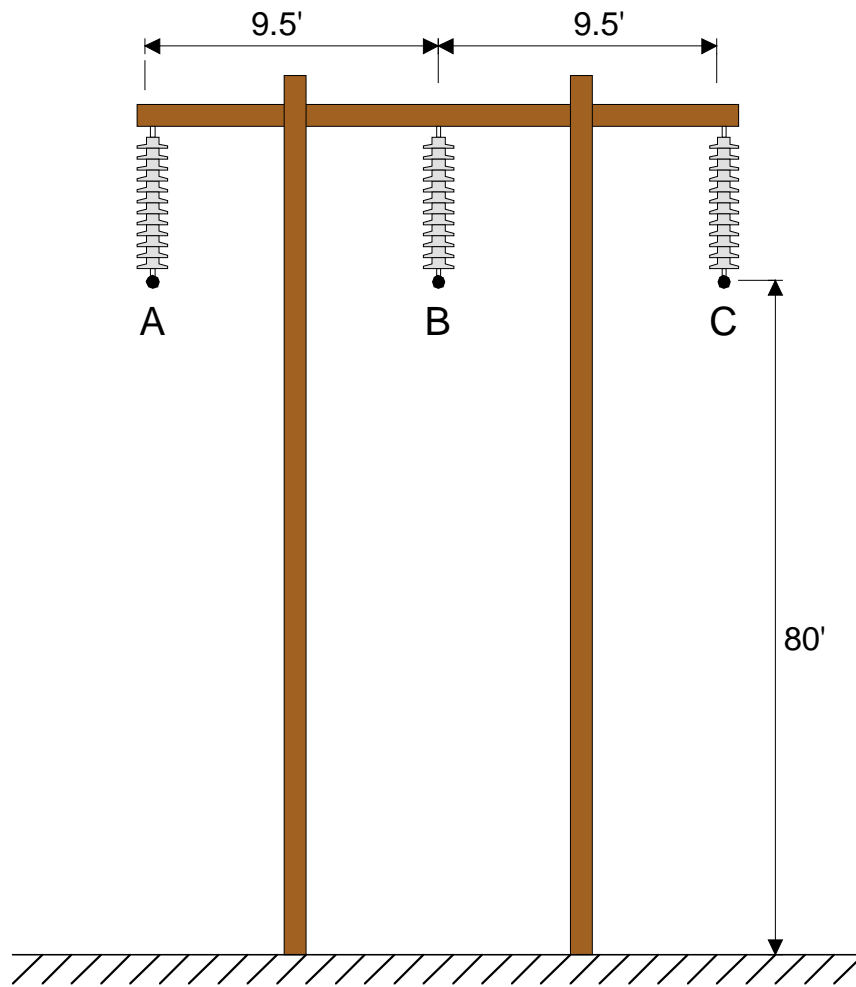


Figure P1b