


# Voice Synthesizer Volume Adjustment

## VERSION 1.0 FOR THE ICOM R75

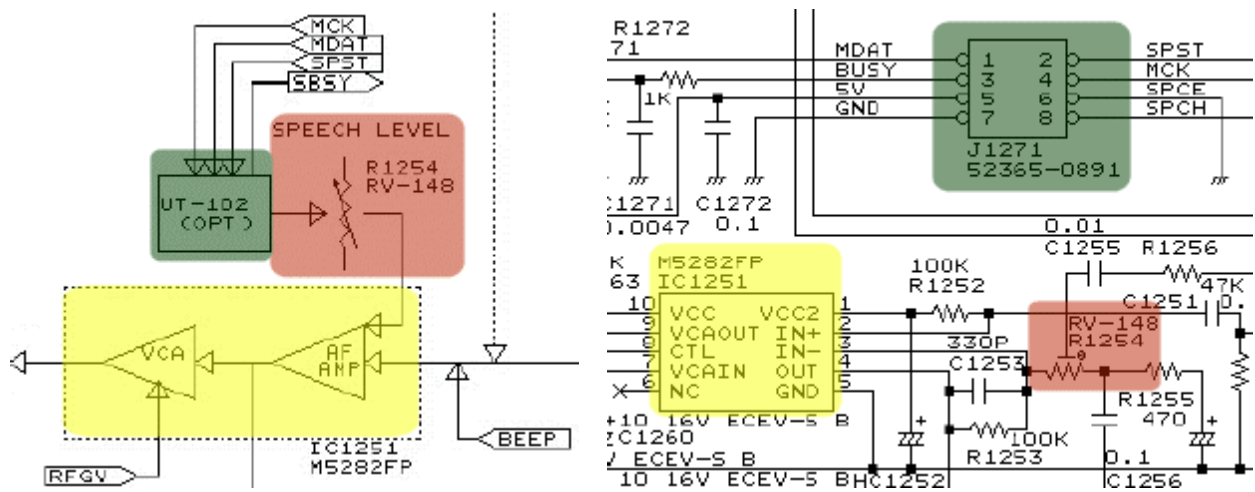

**CAUTION:** This procedure has not yet been tested.


**DISCLAIMER:** The author is not responsible for any damage resulting from this procedure.

### 1. Abstract:

The following procedure alters the volume on the optional UT-102 voice synthesizer.

### 2. Methods:

- Turn the receiver off and remove the six case screws.
- Using a plastic screwdriver adjust R1254 (see red below).

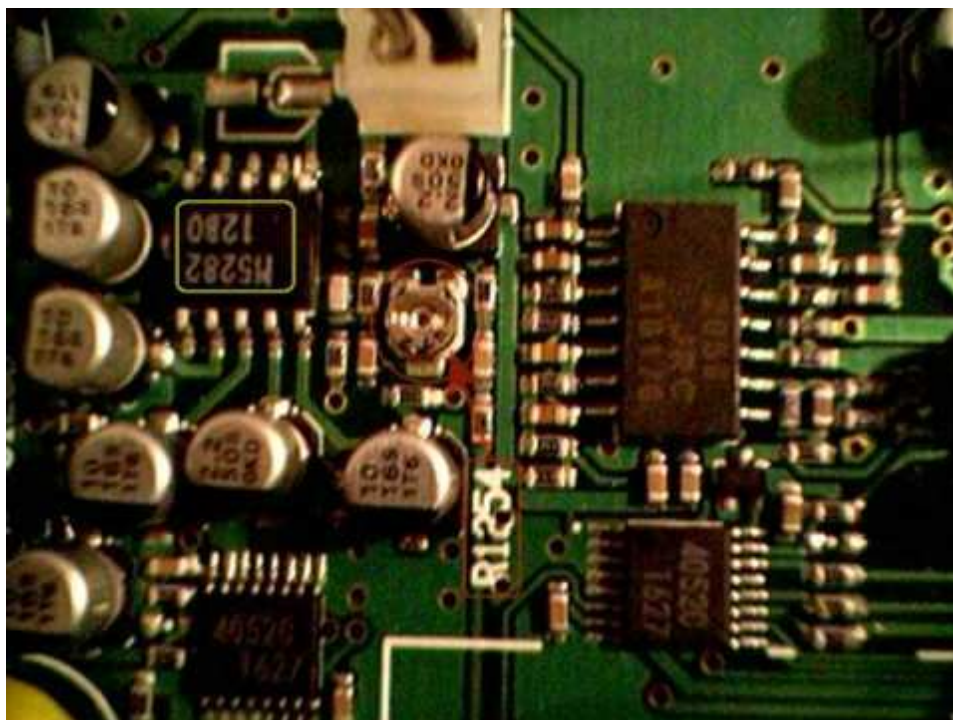

- Replace the six case screws.

Notice the M5282 amplifier (yellow) and R1254 resistor (red) in the block, schematic, and picture.

**WARNING:** Only use a plastic screwdriver and DO NOT drop screws into the unit.

## contact

I can be reached at [just\\_rtfm@yahoo.com](mailto:just_rtfm@yahoo.com) with any comments. dr phil :)



'It is pointless to resist.'

©2003 Phil

**[EOF]**